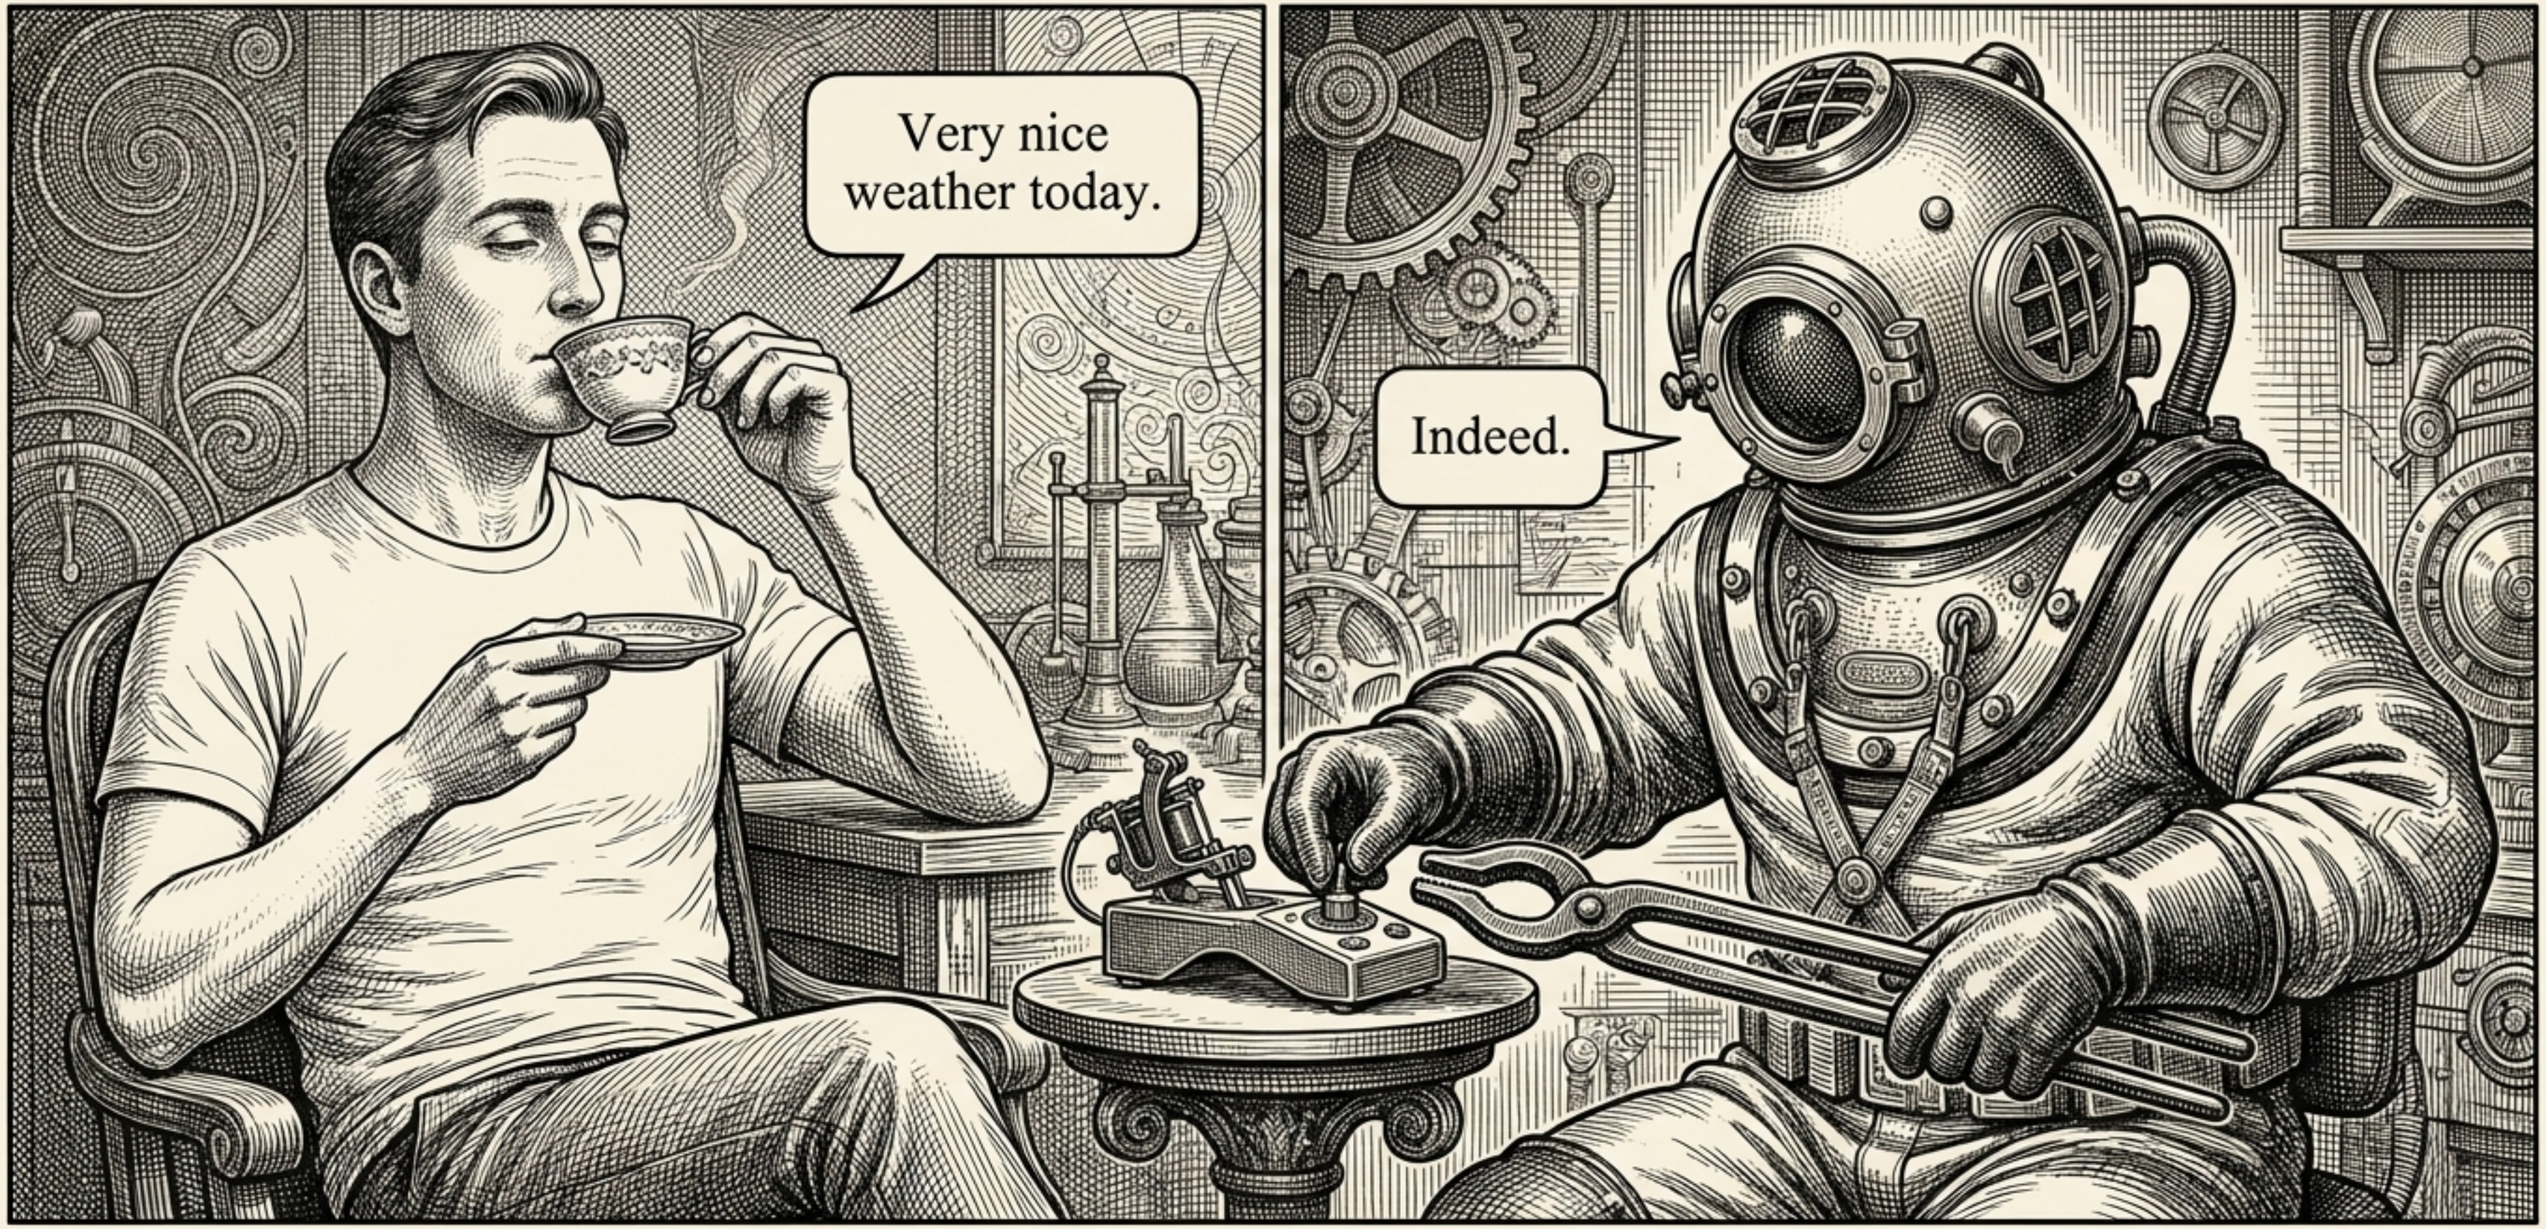

The working voltage range of 4.5V to 12V allows for versatility across different skin types and application techniques.

Extreme voltage protocols remain strictly optional.