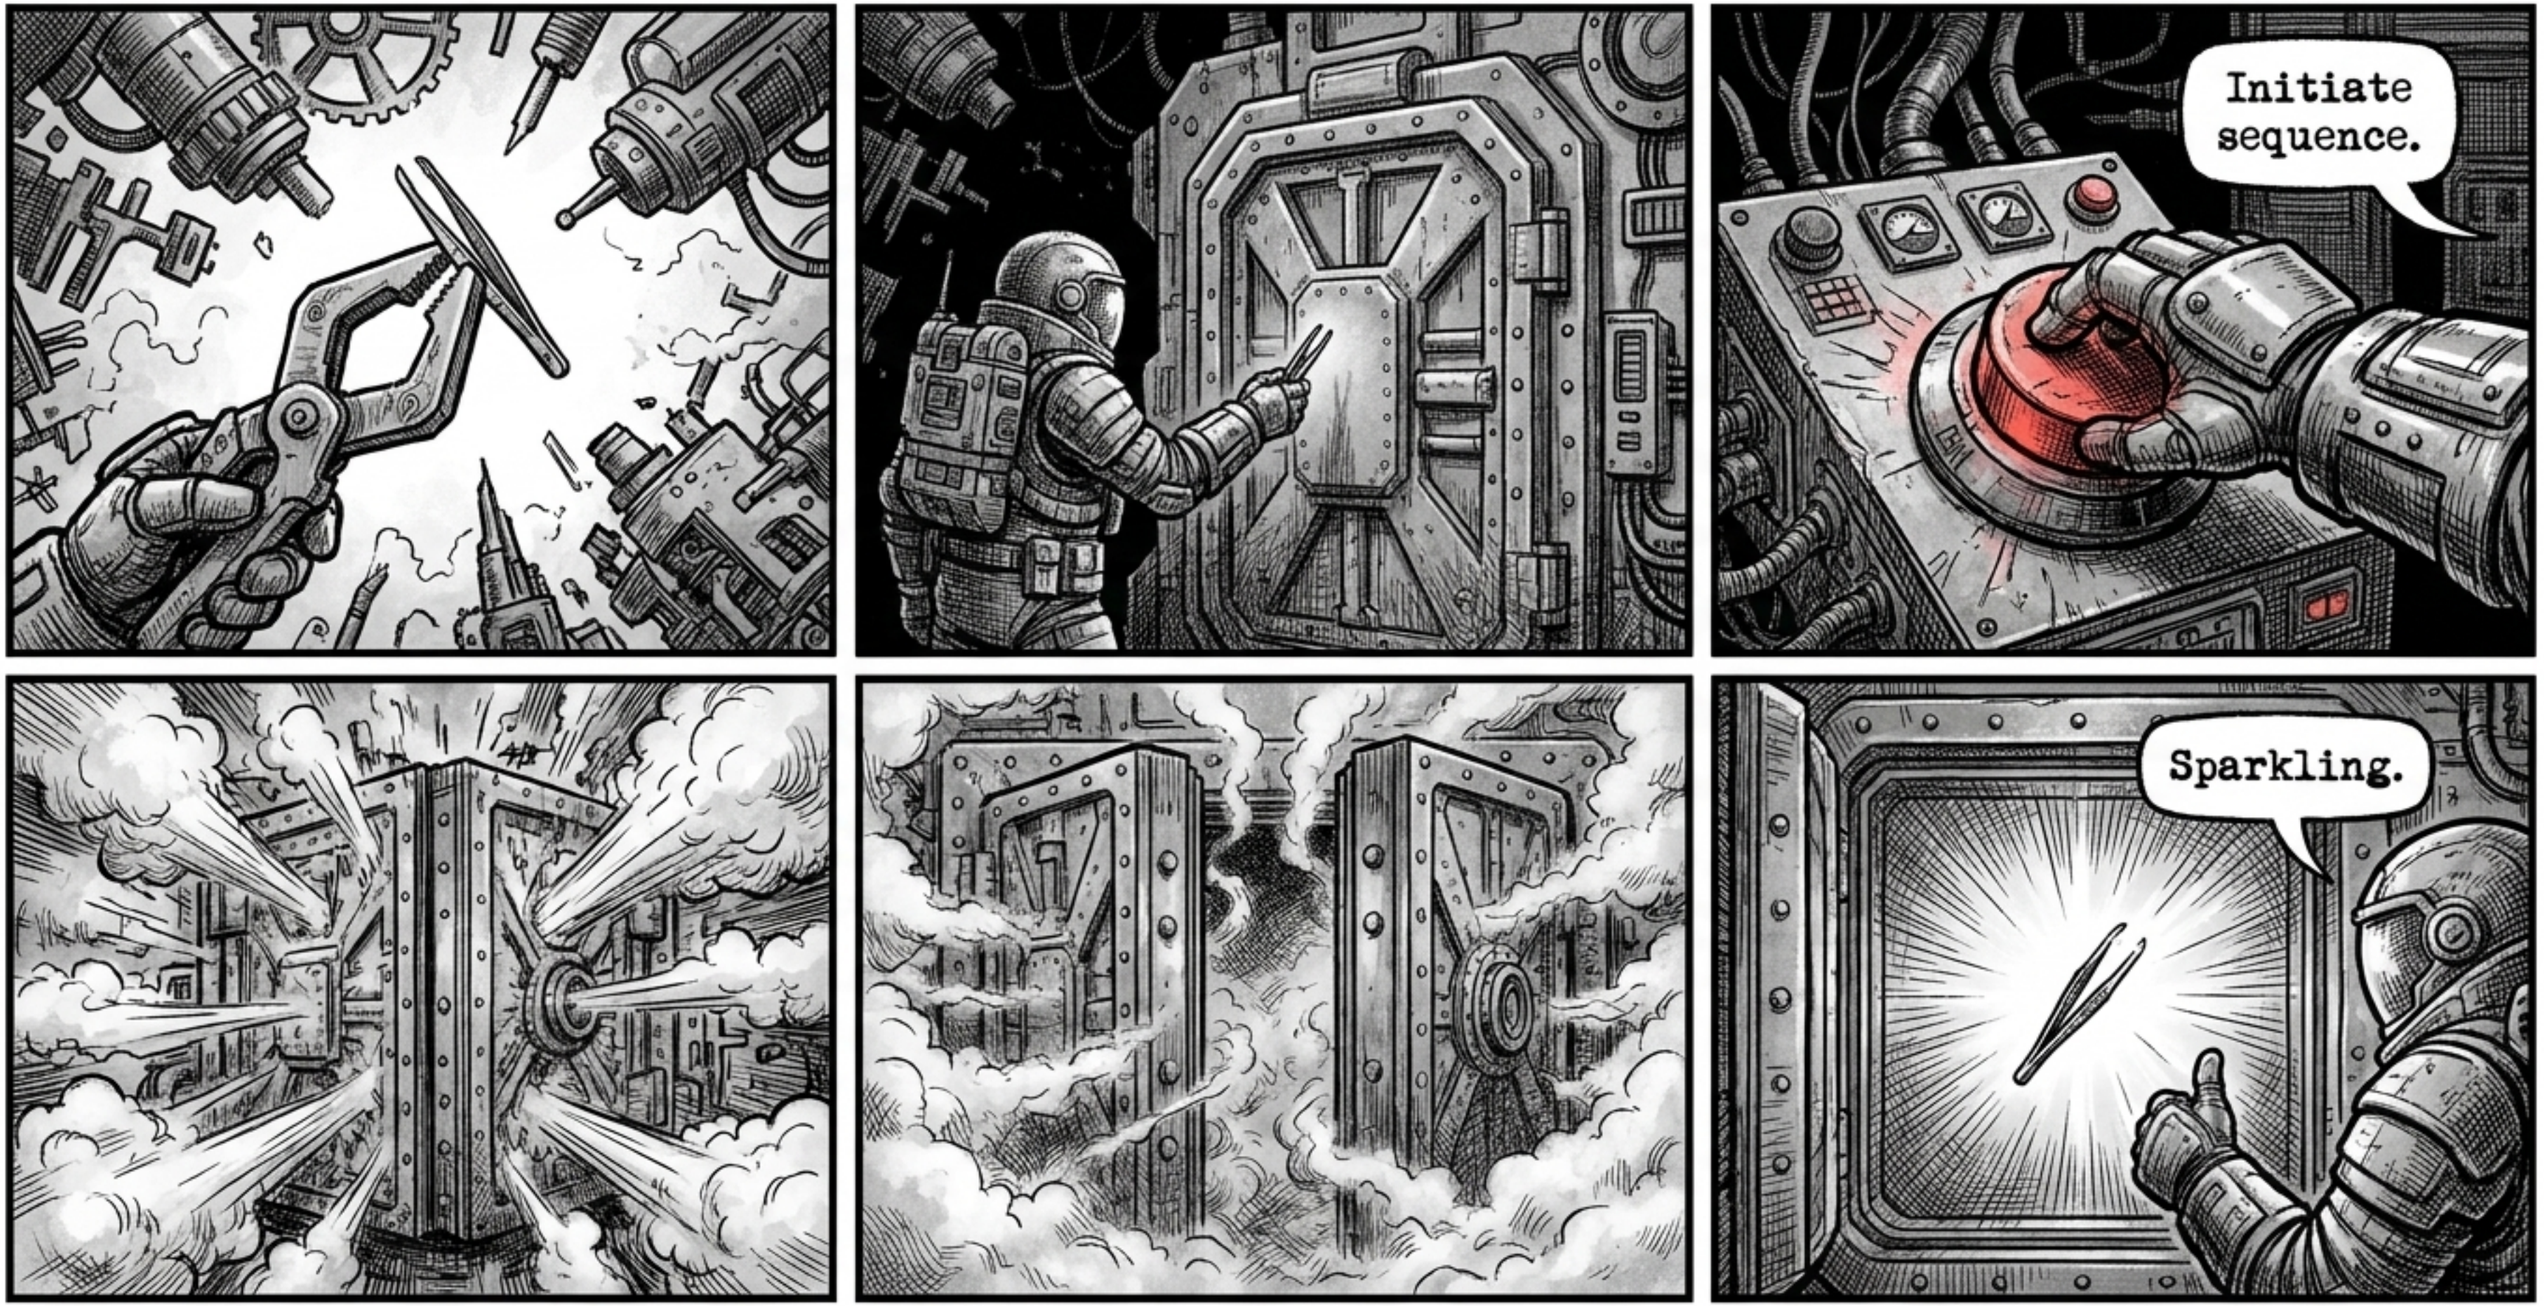

Steam sterilisation is dependent on direct contact between the load material and saturated steam under pressure in the absence of air.

The atmospheric containment chamber is overkill for tweezers.