STANDARD INTERNAL THREAD SPECIFICATIONS
PRIMARY CUT: 0.8 MM DIAMETER
ALTERNATE CUT: 0.9 MM DIAMETER
STANDARD DEPTH: 2 MM

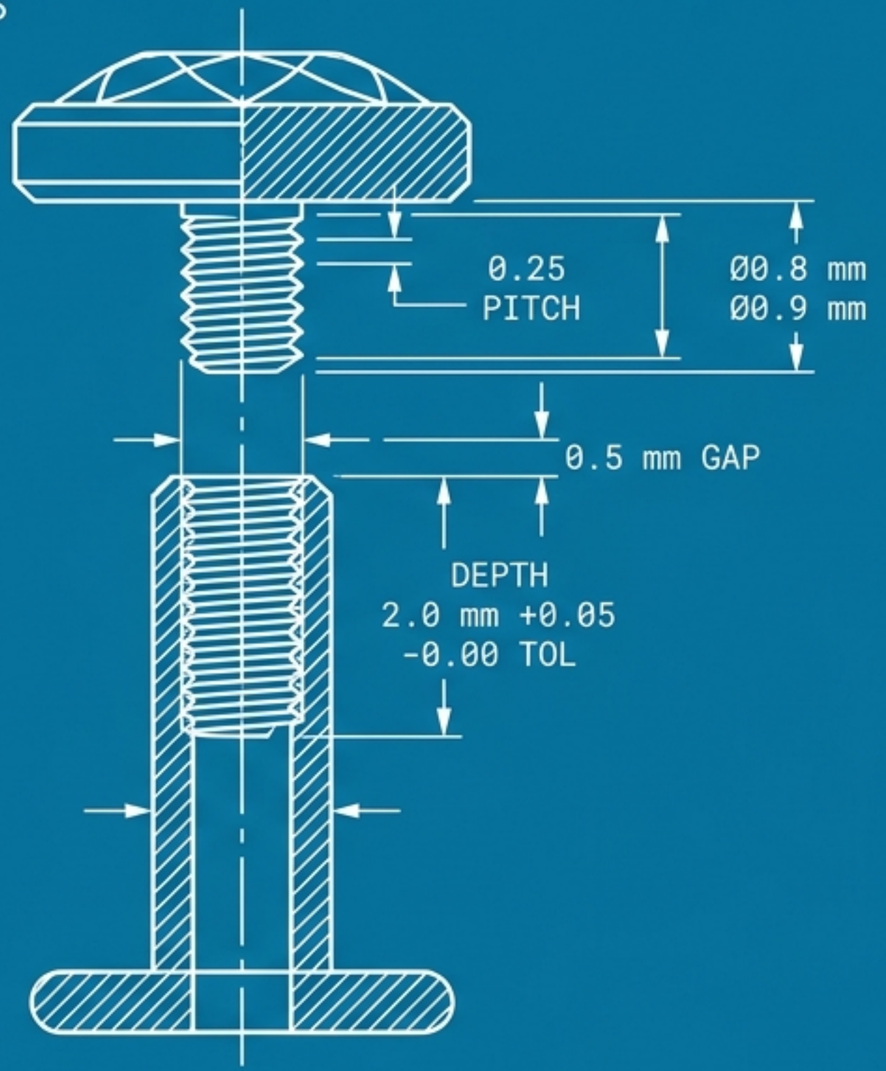

PRECISION MACHINING PREVENTS TISSUE DAMAGE DURING JEWELRY INSERTION.

MATCH INTERNAL THREADS PRECISELY.