Shell thickness max 10 micrometers
Total diameter limit 100 micrometers
Dermal injection depth 2 millimeters
Melting point 60 degrees Celsius

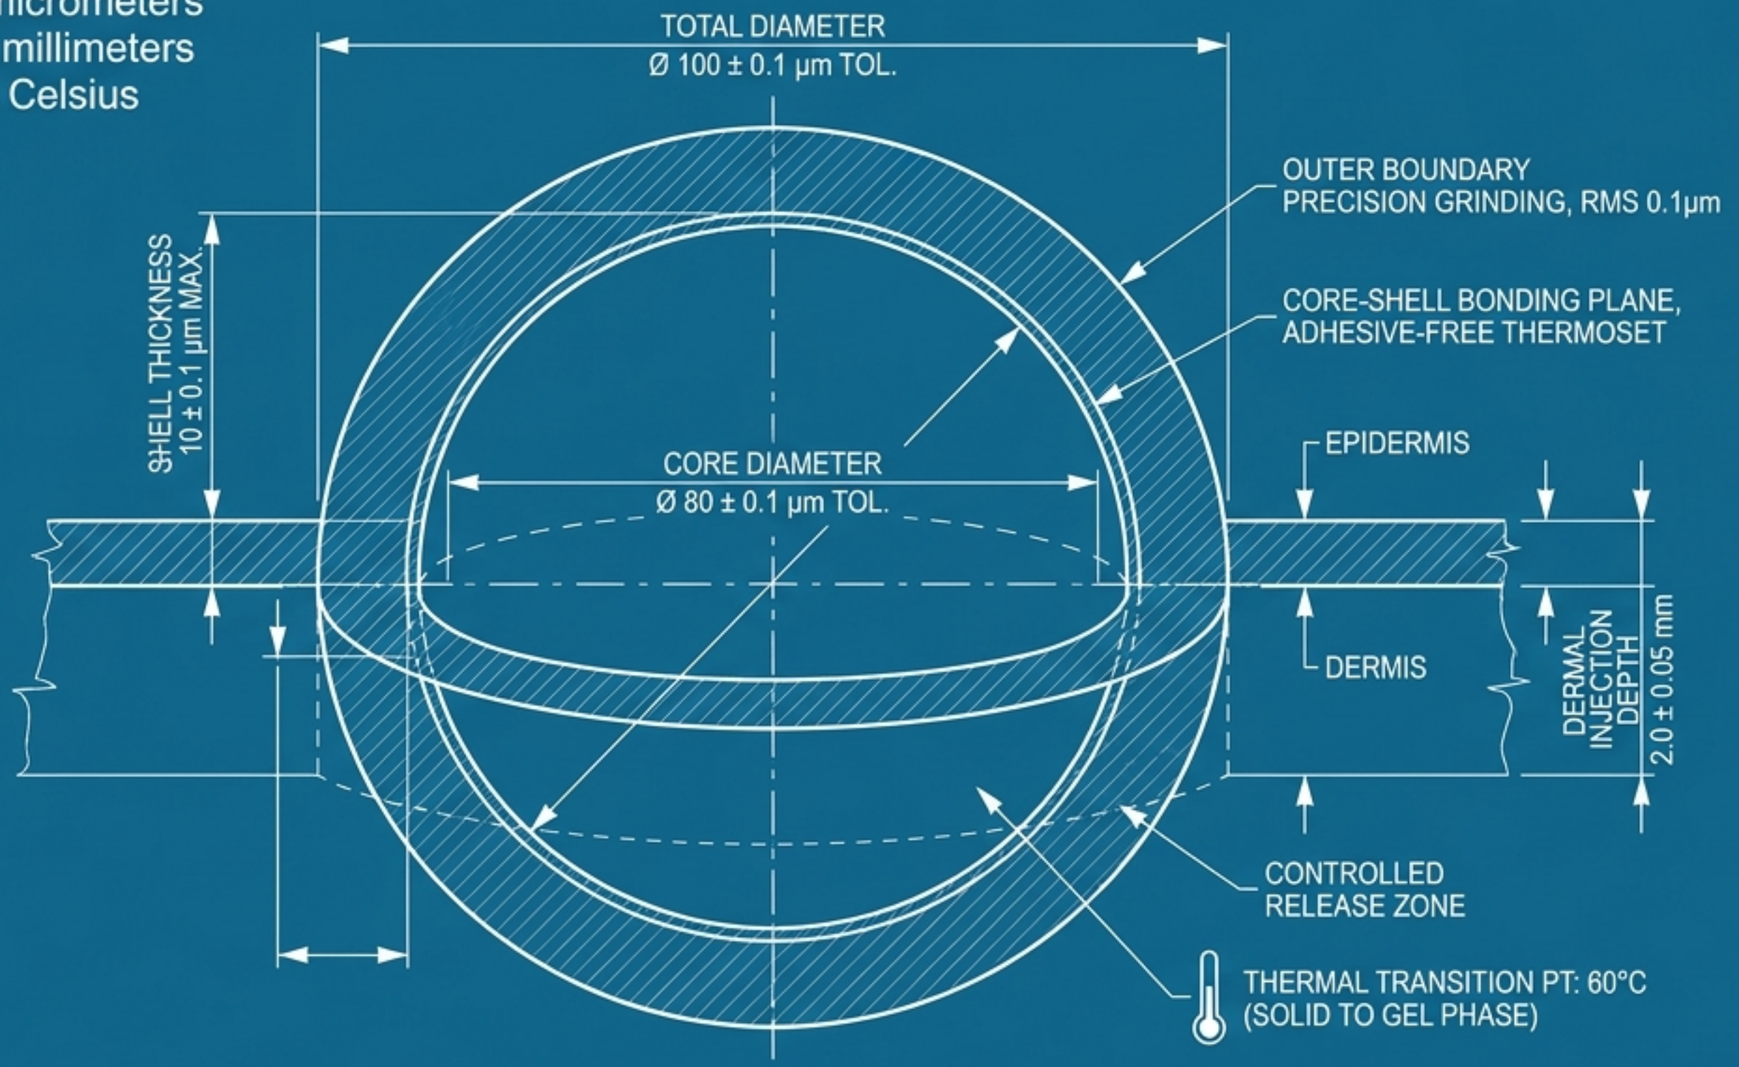

Bioabsorbable polymer shells delay coloring agent degradation.

MAINTAIN PRECISE INJECTION DEPTH.